
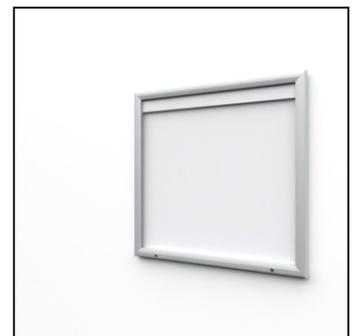


PRODUCT SHEET

Outdoor Lockable Showcase Illuminated Logo With Gas Spring 21 x

SCT21xA4PHLED

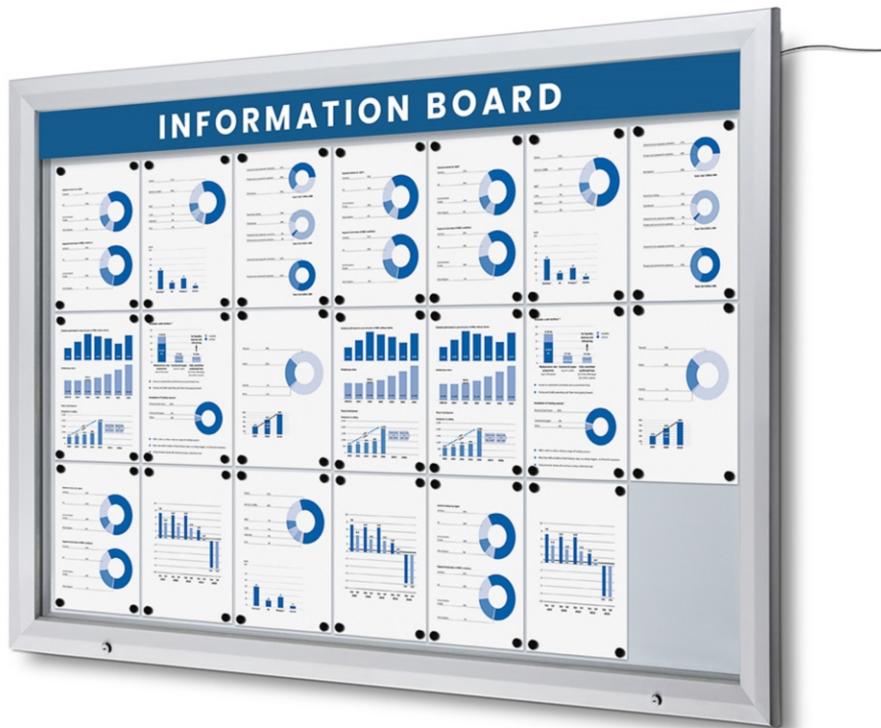


- 21x A4 showcase for outdoor use IP56 certified
- Comes with a magnetic writable metall backwall
- Front with a hinged door with Gasdruckfedern with ESG safety glass
- Highlight your logo on the topcard

PRODUCT SHEET

Outdoor Lockable Showcase Illuminated Logo With Gas Spring 21 x

SCT21xA4PHLED

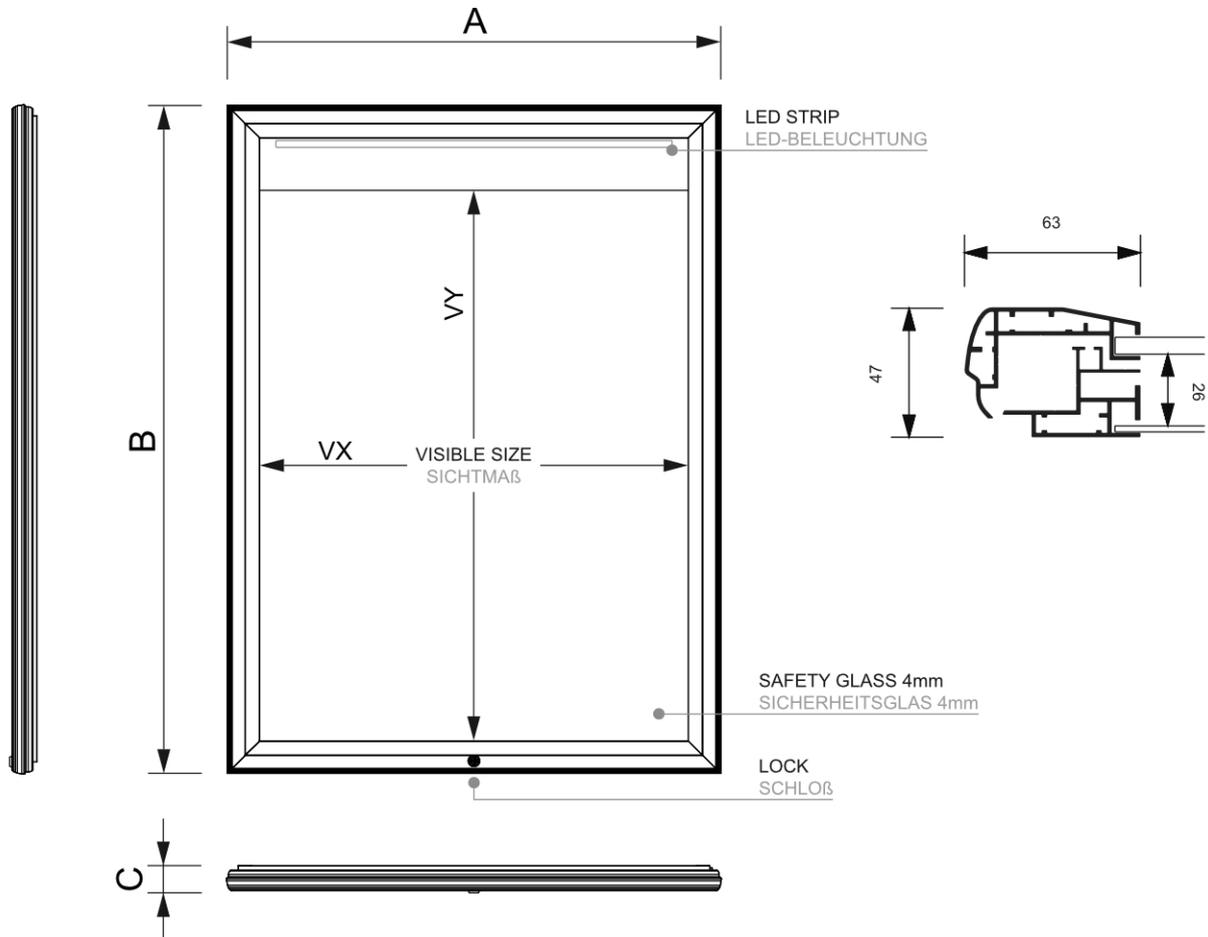

PLEASE NOTE!

If the connection for the mains power supply to the transformer is outdoors or within a humid environment an IP weather proof connection box (as shown) is required. To avoid this we would recommend the transformer is situated inside the building with the 230-240v connection indoors.

BITTE BEACHTEN!

Sollte sich die Verbindung des Haupt-Stromanschlusses zum Transformator im Außenbereich befinden oder aber in einer feuchten Umgebung, so muss ein Gehäuse mit einer IP Schutzklassifizierung (siehe Abbildung) zur Verkabelung verwendet werden. Um dies zu vermeiden, sollte der Transformator möglichst innerhalb eines Gebäudes mit einem 230-240V Innen-Anschluss untergebracht sein.

ACCESSORIES
ZUBEHÖR



(MAGNETS)
MAGNETS
MAGNETE



(SETFIXWB)
MARKER PENS
WHITEBOARDMARKER-SET



(WBERASER)
ERASER
WHITEBOARDSCHWAMM



(WBCLEANER)
SPRAY CLEANER
WHITEBOARDREINIGER



(STARTERKIT)
STARTERKIT
STARTERSET

PRODUCT SHEET

Outdoor Lockable Showcase Illuminated Logo With Gas Spring 21 x

SCT21xA4PHLED

GENERAL INFO

| SKU | Sizes (mm) (A x B x C) | Format (mm) | Visible size (mm) (VXxVY) | Hole spacing (mm) (XxY) |
|---------------|---------------------------|-------------|------------------------------|----------------------------|
| SCT21xA4PHLED | 1685 x 1167 x 47 | 21 x A4 | 1558 x 940 mm | - |

| Orientation | Weight (kg) |
|-------------|-------------|
| Vertical | 43,54 |

ELECTRICAL INFORMATION

| Illumination | Lighting colour (K) | Luminosity (cd) | Light intensity (lx) | Wattage (W) |
|--------------|---------------------|-----------------|----------------------|-------------|
| Yes | 6000 - 7000 K | - | - | 12,8 W |

PACKAGING INFORMATION

| Packaging unit 1 (mm) | Packaging unit 2 (mm) | Packaging unit 3 (mm) |
|--------------------------|--------------------------|--------------------------|
| 1754 x 1324 x 104 | - | - |

| Palette number of pieces | Palette weight (kg) | Palette type |
|-----------------------------|---------------------|--------------|
| 7 | 358 | EUR |

ADDITIONAL INFORMATION

| Product certifications | EAN |
|------------------------|---------------|
| IP56, DIN4102B1 | 8595578322347 |